


Dynamic Flexible Microphone GM-700M411C

Application : Closed talk small noise at low frequency



CIRCUIT DIAGRAM

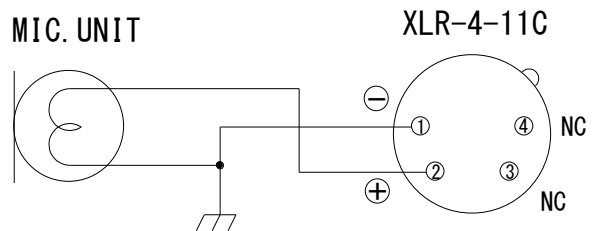

SPECIFICATIONS

RoHS II

Type	Moving coil
Directivity	Uni-Directional
Sensitivity	-58dB ± 3dB (0dB=1V/Pa 1kHz)
Frequency Response	200~10,000Hz
Impedance	600Ω ± 30% Balanced
Output C	XLR-4-11C
Dimensions	φ 23 × 300mm
Finish	Black Painted
Weight	175 g

FREQUENCY RESPONSE

