

# Closed talk Dynamic Microphone Unit

*MU-19RH-G*

Application : Closed talk type. Low frequency Low noise

The best for a hand microphone

High sensitivity type




## SPECIFICATIONS

RoHS II

Type	Moving coil
Directivity	Uni-directional
Sensitivity	-58dB±3dB (0dB=1V/Pa,1kHz)
Frequency Response	500~8,000Hz
Impedance	600Ω ±30% at 1kHz
Output	Terminal Type
Finish	Black case
Dimension	φ19 × 11.7 mm
Weight	7.5g

FREQUENCY RESPONSE

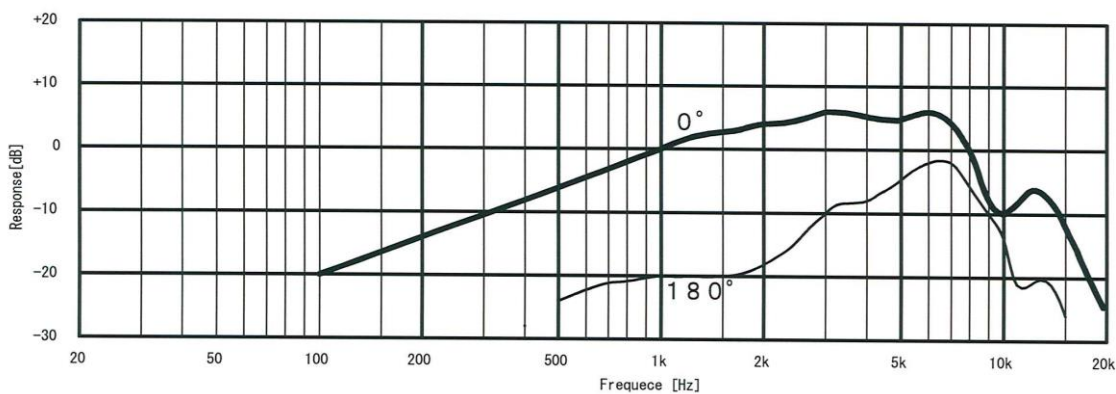

ARTIFICIAL MOUTH FREQUENCY RESPONSE (10mm)

