

# Closed talk Dynamic Microphone Unit

MU-19R

Application : Closed talk low noise at low frequency




## SPECIFICATION

RoHS II

Type	Moving coil
Directivity	Uni-directional
Sensitivity	-60dB±3dB (0dB=1V/Pa,1kHz)
Frequency Response	300~13,000Hz
Impedance	240Ω±30% at 1kHz
Output	Terminal Type
Finish	Black case
Dimension	φ19 × 11.7 mm
Weight	7.5g

## FREQUENCY RESPONSE

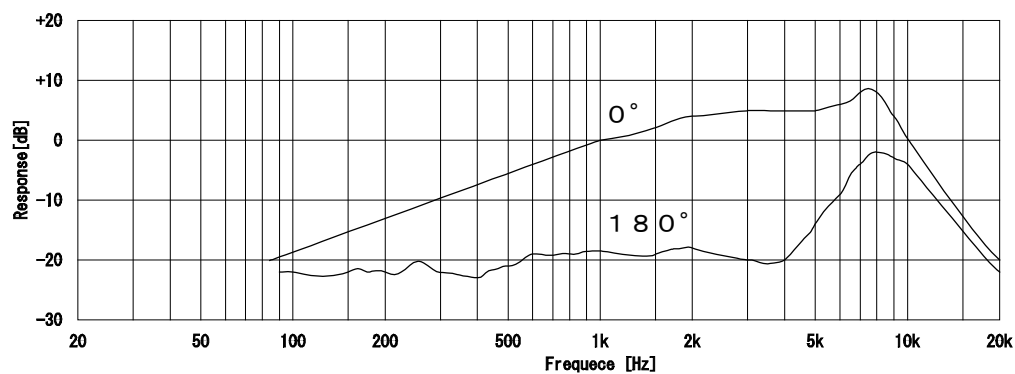

## ARTIFICIAL MOUTH FREQUENCY RESPONSE (D=10mm)

