


SHOTGUN MICROPHONE *SCM-5000*

19 ϕ / Second Pressure Gradient Technology / Phantom Power Supply

Application : Excellent sound rejection from the side and rear

Narrow polar pattern allows outdoor wildlife recording

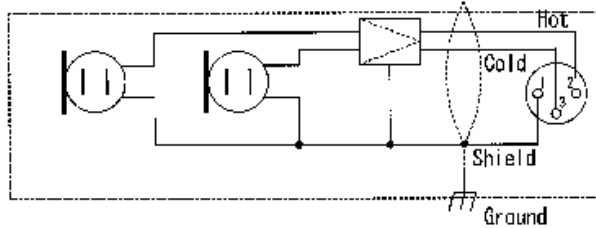

Schematic diagram

SPECIFICATIONS

RoHS II

Type	Back Electret Condenser
Directivity	Super cardioid
Sensitivity	-30dB \pm 3dB (0dB=1V/Pa 1kHz)
Frequency Response	50~18,000Hz
Maximum Input Sound Pressure Level	110dB S.P.L (at 1kHz 1%T.H.D)
S/N Ratio	68 dB min at 1 k Hz (1Pa,A weighted network)
Impedance	50 Ω \pm 30% at 1 k Hz
Power	Phantom Power P48 (48V 2 \pm 4V)
Current Consumption	3mA max
Output Connector	XLR-M Type
Dimensions	ϕ 19 \times 205 mm
Weight	78 g

Accessory	Windscreen----1 (Black)
-----------	-------------------------

FREQUENCY RESPONSE

